
Datasheet for: 3PTS01271

Product Type: 3P+N Isolating Delta Star

1kva 3P Delta Star 380v to 415v Hardwired

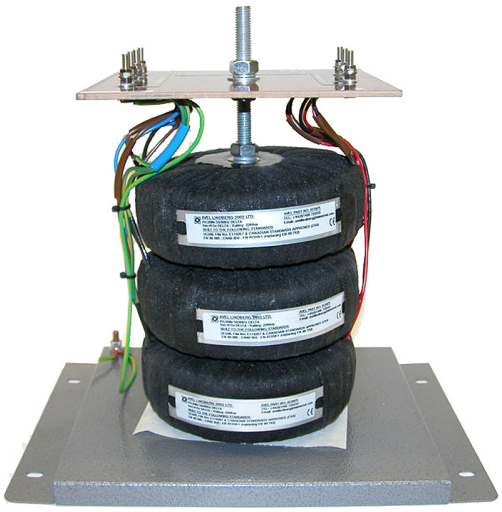

VA	1000
Input Voltage	380
Input Termination	3 way screw terminals
Input Current	1.52
amps	1.39
Output Voltage	415
Output Notes	Line to Line 415v Line to neutral 240vac
Output Termination	3 way screw terminals
Product Case	P4 Industrial floor/wall mounting case IP23
Dimension	Ht:270 L: 338 W:215 (mm)
Weight	12kg
Product Type	Isolating transformer Conforms to EN61558-2-6 CE & RoHS
Regulation	6.6%

Commodity code: 851539130

RoHS Certificate: Airlink Transformers certifies and testifies that all the products and goods delivered and invoiced, do not contain any of the hazardous substances as mentioned in the 2011/65/EU European directives (RoHS). Particularly these products do not contain: Heavy metals such as Pb, Cd, Cr6+ Bifenil Polybromurate (PBB) Ethere Difenil Polybromurate (PEDE)

Declaration of Conformity: Airlink Transformers declare that the product 3PTS01271 conforms to current European safety and EMC regulation EN61558-2-6 (Safety Isolating transformer) CE & RoHS compliant. Manufactured to Class A 105degC.

Declaration by the Exporter: The exporter of the product covered by this document declares that these products are of EU preferential origin.
04/11/2026

www.airlinktransformers.com - VAT No. 573 1888 10
Airlink Transformers is a trading name of Albury Services Ltd company reg No 2666478
14 Capital Place, Lovet Road, The Pinnacles, Harlow, Essex, UK, CM19 5AS
01279 431865 | sales@airlinktransformers.com