




Datasheet for: 3PHD02528

Product Type: 3P Isolating Delta Delta

2.5kva 3P Delta Delta 400v to 200v Hardwired

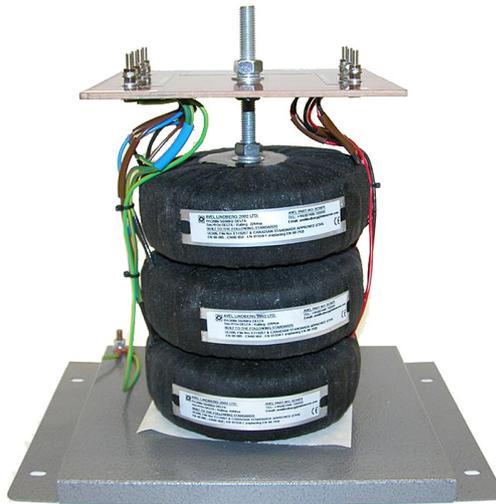

VA	2500
Input Voltage	400
Input Termination	Brass Terminal Posts
Input Current	3.61
amps	7.23
Output Voltage	200
Output Termination	Brass Terminal Posts
Product Case	P5 Industrial floor/wall mounting case IP23
Dimension	Ht:353 L: 350 W:242 (mm)
Weight	15kg
Product Type	Isolating transformer Conforms to EN61558-2-6 CE & RoHS
Regulation	.04

Commodity code: 851539130

RoHS Certificate: Airlink Transformers certifies and testifies that all the products and goods delivered and invoiced, do not contain any of the hazardous substances as mentioned in the 2011/65/EU European directives (RoHS). Particularly these products do not contain: Heavy metals such as Pb, Cd, Cr6+ Bifenil Polybromurate (PBB) Etere Difenil Polybromurate (PEDE)

Declaration of Conformity: Airlink Transformers declare that the product 3PHD02528 conforms to current European safety and EMC regulation EN61558-2-6 (Safety Isolating transformer) CE & RoHS compliant. Manufactured to Class A 105degC.

Declaration by the Exporter: The exporter of the product covered by this document declares that these products are of EU preferential origin. 27/05/2026



www.airlinktransformers.com - VAT No. 573 1888 10
Airlink Transformers is a trading name of Albury Services Ltd company reg No 2666478
14 Capital Place, Lovet Road, The Pinnacles, Harlow, Essex, UK, CM19 5AS
01279 431865 | sales@airlinktransformers.com