




# Datasheet for: 3PHD30925

## Product Type: 3P Isolating Delta Delta

30kva 3P Delta Delta 400v to 240v Hardwired

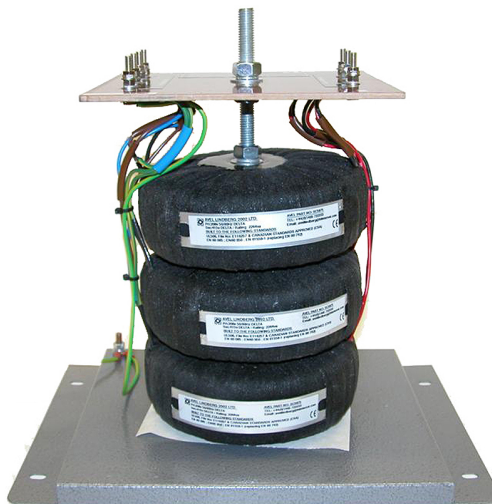

|                    |   |
|--------------------|---|
| VA                 | 30000   |
| Input Voltage      | 400   |
| Input Termination  | M12 Brass studs   |
| Input Current      | 43.35   |
| amps               | 72.25   |
| Output Voltage     | 240   |
| Output Termination | M12 Brass studs   |
| Product Case       | T4 Industrial floor/wall mounting case IP23             |
| Dimension          | Ht:600 L: 625 W:500 (mm)                                |
| Weight             | 160kg   |
| Product Type       | Isolating transformer Conforms to EN61558-2-6 CE & RoHS |
| Regulation         | .04   |

Commodity code: 851539130

**RoHS Certificate:** Airlink Transformers certifies and testifies that all the products and goods delivered and invoiced, do not contain any of the hazardous substances as mentioned in the 2011/65/EU European directives (RoHS). Particularly these products do not contain: Heavy metals such as Pb, Cd, Cr6+ Bifenil Polybromurate (PBB) Ethere Difenil Polybromurate (PEDE)

**Declaration of Conformity:** Airlink Transformers declare that the product 3PHD30925 conforms to current European safety and EMC regulation EN61558-2-6 (Safety Isolating transformer) CE & RoHS compliant. Manufactured to Class A 105degC.

**Declaration by the Exporter:** The exporter of the product covered by this document declares that these products are of EU preferential origin. 25/05/2026



www.airlinktransformers.com - VAT No. 573 1888 10  
Airlink Transformers is a trading name of Albury Services Ltd company reg No 2666478  
14 Capital Place, Lovet Road, The Pinnacles, Harlow, Essex, UK, CM19 5AS  
01279 431865 | sales@airlinktransformers.com