
# Datasheet for: 3PTS25671

## Product Type: 3P+N Isolating Delta Star

25kva 3P Delta Star 380v to 415v Hardwired

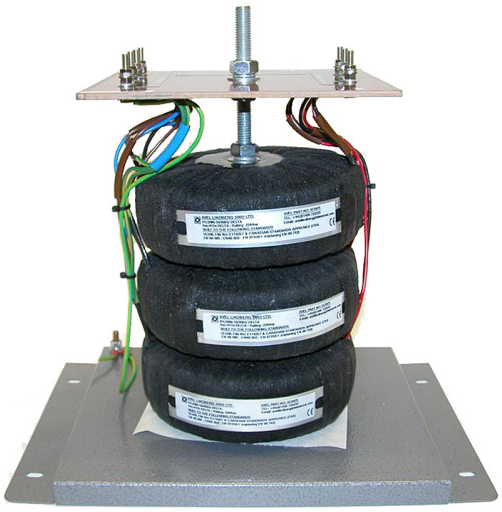

| | |
|---|---|
| VA | 25000 |
| Input Voltage | 380 |
| Input Termination | M8 Brass studs |
| Input Current | 38.03 |
| amps | 34.82 |
| Output Voltage | 415 |
| Output Notes | Line to Line 415v Line to Neutral 240v |
| Output Termination | M8 Brass studs |
| Product Case | T3 Industrial floor/wall mounting case IP23 |
| Dimension | Ht:500 L: 525 W:450 (mm) |
| Weight | 150kg |
| Product Type | Isolating transformer Conforms to EN61558-2-6 CE & RoHS |
| Regulation | 3.5% |

**Commodity code:** 851539130

**RoHS Certificate:** Airlink Transformers certifies and testifies that all the products and goods delivered and invoiced, do not contain any of the hazardous substances as mentioned in the 2011/65/EU European directives (RoHS). Particularly these products do not contain: Heavy metals such as Pb, Cd, Cr6+ Bifenil Polybromurate (PBB) Ethere Difenil Polybromurate (PEDE)

**Declaration of Conformity:** Airlink Transformers declare that the product 3PTS25671 conforms to current European safety and EMC regulation EN61558-2-6 (Safety Isolating transformer) CE & RoHS compliant. Manufactured to Class A 105degC.

**Declaration by the Exporter:** The exporter of the product covered by this document declares that these products are of EU preferential origin.
04/11/2026

www.airlinktransformers.com - VAT No. 573 1888 10
Airlink Transformers is a trading name of Albury Services Ltd company reg No 2666478
14 Capital Place, Lovet Road, The Pinnacles, Harlow, Essex, UK, CM19 5AS
01279 431865 | sales@airlinktransformers.com