




Datasheet for: ASF5120MP

Product Type: Advanced Filter Balanced Power Supply

5000VA 230/240/250V to 230V CTE & MCBs Hardwired Balanced PSU with Avery Magnetics Advanced Filter System and Soft Start. MP model has additional input taps of 240V and 250V for use in areas with higher mains voltages.

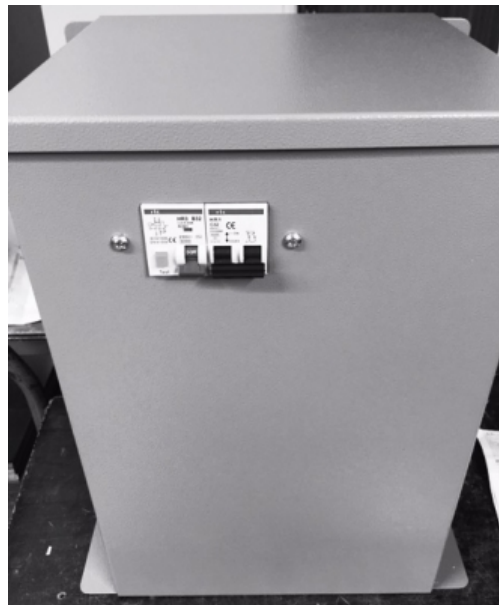

VA	5000
Input Voltage	230
Input Termination	Screw terminals
Input Current	20
amps	20
Output Voltage	230
Output Termination	Screw terminals
Product Case	P5 Industrial floor/wall mounting case IP23
Dimension	Ht:353 L: 350 W:242 (mm)
Weight	30kg
Primary Protection	MCB'S 20A 2P Type C
Secondary Protection	RCBO 20A 2P Type C
Surge Protection	ASF Soft Start
Product Type	Safety Isolating transformer Conforms to EN61558-2-23 CE & RoHS
Standard	Conforms to EN61558-2-23 CE & RoHS

Commodity code: 851539130

RoHS Certificate: Airlink Transformers certifies and testifies that all the products and goods delivered and invoiced, do not contain any of the hazardous substances as mentioned in the 2011/65/EU European directives (RoHS). Particularly these products do not contain: Heavy metals such as Pb, Cd, Cr6+ Bifenil Polybromurate (PBB) Ether Difenil Polybromurate (PEDE)

Declaration of Conformity: Airlink Transformers declare that the product ASF5120MP conforms to current European safety and EMC regulation EN61558-2-6 (Safety Isolating transformer) CE & RoHS compliant. Manufactured to Class A 105degC.

Declaration by the Exporter: The exporter of the product covered by this document declares that these products are of EU preferential origin.
02/07/2026



www.airlinktransformers.com - VAT No. 573 1888 10
Airlink Transformers is a trading name of Albury Services Ltd company reg No 2666478
14 Capital Place, Lovet Road, The Pinnacles, Harlow, Essex, UK, CM19 5AS
01279 431865 | sales@airlinktransformers.com